

## JaourTak™ 2801CH

HMPSA

Issued Date: 20150415/MVW  
Version 2.1

### DESCRIPTION


The JaourTak™ 2801HCH is a synthetic rubber based hot melt pressure sensitive adhesive specifically developed for medical applications of plasters and bandages. The product is featured very high tack and peel, high shear, and good ageing performance.

### SUGGESTED USES

Medical plasters and bandages to various substrates, wound dressing.  
Other pressure sensitive adhesive applications that high bond strength and tack, high shear are required.

### TYPICAL PROPERTIES

<b>Appearance :</b>	Pigmented white solid		
<b>Color (Gardner) :</b>	Pigmented white		
<b>Softening Point (R&amp;B) :</b>	approx.	109	°C
<b>Viscosity (Brookfield) :</b>			
<b>@140°C</b>	approx.	41,000	cps
<b>@160°C</b>	approx.	14,500	cps
<b>@180°C</b>	approx.	4,600	cps
<b>@200°C</b>	approx.	2,650	cps

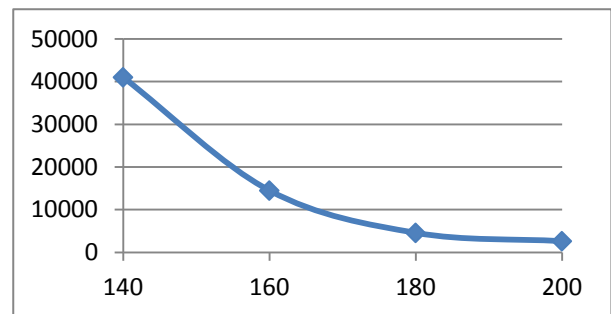

### OPERATING GUIDES

The material can be applied by slot or roll coating applicators. Suggested operation temperature is 160 – 190°C for both, depending on machines, substrates, and plant conditions.

### FDA STATUS

The product complies with the FDA Indirect Food Contact Regulation of 21 CFR 175.105, "Adhesives".

### PACKAGE

6.25kg or 1kg block wrapped with siliconized release paper, 25kg/box.  
Please consult the sales representative for special requirements.

### STORAGE & SHELF LIFE

The material can be stored indoor for 12 months, from the date of manufacture, in its original packages under dry and clean conditions at ambient temperature below 35°C and above 5°C.  
Direct sunlight and moisture condensation must be prevented.

### OPERATING PRECAUTIONS

Do not mix with other adhesives to prevent contamination. The material is applied hot. Appropriate personal protective clothing and eye protection are strongly recommended to prevent burns. Adequate ventilation is suggested to remove any vapors or fumes generated. Rotate stocks and using the oldest stock first.

**\*\* Read the Operating Precautions and MSDS Carefully and Thoroughly Before Using the Product \*\***

**WARRANTY:** The information and data presented herein are, to the best of our knowledge, to be accurate for the materials and test conditions specified at this report. They are intended for use by persons having technical skills and at their own discretion and risk, no warranty or guarantee, expressed or implied, is made and no liability is assumed in connection with any use of such information and data. Nothing herein shall be construed as recommendation to infringe any existing patents or violate any applicable laws. We, therefore, urge and recommend proper and adequate tests to be done by the purchasers before using the product.

Shanghai Jaour Adhesive Products Co., Ltd.

No. 3077, Liuxiang Road, Jiading District, Shanghai 201818, P.R. China

Tel : +86-21-59511061 Fax : +86-21-59511519